



SEALED PERFORMANCE BATTERIES

PROVIDING SEALES LEAD ACID BATTERY FOR SOLAR ENERGY

 **VOLTINGER**
SOLAR BATTERIES

VOLTINGER SOLAR Battery

SRG20012V7AH(12V7Ah)

Specifications

Rated Voltage 12V

Nominal Rate (7ah)

Dimension	Length	151±1mm (5.94 inches)
	Width	65±1mm (2.56 inches)
	Container Height	93.5±1mm (3.68 inches)
	Total Height	99±1mm (3.90 inches)

Approx. Weight 2.08 Kg (4.54 lbs)

Terminal T1

Container Material ABS: UL 94 HB or V-0

Rated Capacity (25°C)	6.51 Ah	(10hr, 0.651A, 1.80V/cell)
	6.38 Ah	(8hr, 0.798A, 1.80V/cell)
	6.00 Ah	(5hr, 1.20A, 1.75V/cell)
	5.52 Ah	(3hr, 1.84A, 1.75V/cell)
	4.49 Ah	(1hr, 4.49A, 1.67V/cell)

Max. Discharge Current 90A

Internal Resistance (25°C) Approx. 29mΩ

Operating Temp. Range	Discharge	-20 ~ 55°C (-4 ~ 131°F)
	Charge	-20~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 50°C (5 ~ 122°F)

Nominal Operating Temp. Range 25±3°C (77±5°F)

Max. Charging Current(25°C) 1.75A


Charge voltage(25°C)		Charge voltage	Temp. Coefficient
	Float	2.25 ~2.30V/cell	-3mV/cell/°C
	Equalization	2.30~2.40V/cell	-4mV/cell/°C

Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%

Self Discharge ≤3%/month @ 25°C



Layout

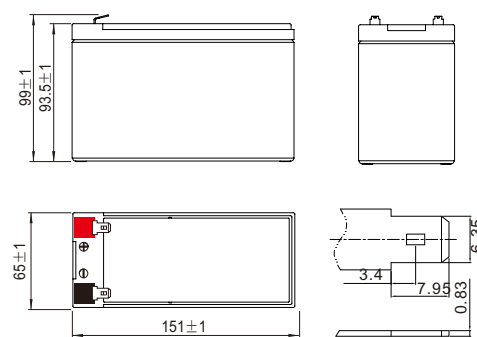

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	17.2	11.6	9.92	7.95	5.90	4.37	3.70	2.77	2.21	1.66	1.31	1.09	0.745	0.610
1.80V/cell	20.0	13.7	11.5	9.16	6.67	4.89	4.09	3.03	2.41	1.79	1.41	1.18	0.798	0.651
1.75V/cell	21.8	14.7	12.2	9.61	6.97	5.09	4.25	3.13	2.48	1.84	1.45	1.20	0.812	0.661
1.70V/cell	23.6	15.7	12.9	10.1	7.28	5.28	4.40	3.23	2.56	1.89	1.49	1.23	0.827	0.671
1.67V/cell	24.7	16.3	13.3	10.4	7.46	5.40	4.49	3.29	2.60	1.92	1.51	1.25	0.836	0.677
1.60V/cell	27.3	17.6	14.2	11.0	7.87	5.67	4.71	3.44	2.71	1.99	1.56	1.28	0.855	0.692

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	37.1	24.6	20.5	15.3	11.4	8.48	7.19	5.39	4.33	3.25	2.58	2.15	1.47	1.21
1.80V/cell	41.6	28.3	23.4	17.5	12.8	9.41	7.91	5.87	4.68	3.50	2.77	2.31	1.57	1.29
1.75V/cell	44.7	29.9	24.4	18.2	13.2	9.72	8.14	6.03	4.80	3.58	2.83	2.36	1.60	1.30
1.70V/cell	47.3	31.4	25.5	18.9	13.7	10.0	8.38	6.19	4.93	3.67	2.89	2.40	1.62	1.32
1.67V/cell	49.0	32.3	26.0	19.3	14.0	10.2	8.51	6.28	4.99	3.71	2.92	2.43	1.64	1.33
1.60V/cell	49.7	34.4	27.4	20.3	14.6	10.6	8.85	6.51	5.16	3.83	3.00	2.49	1.67	1.36

VOLTINGER SOLAR Battery

SRG20012V7AH(12V7Ah)

Applications

- Solar Energy system
- Hospitals & Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Renewable energy
- of-grid projects


General Features

- Battery design life up to 8 years
- Special plate design guarantees battery floating life more than 4000 times
- High thermal capacity reduce the risk of thermal out of control and drying hard, and the battery can be used in bad environment
- Advanced GEL and higher technology for Solar application


Standards

- IEC 60896-21, IEC 60896-22
- Classified as "General Purpose" according to Eurobat
- CE, UL, IEC Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

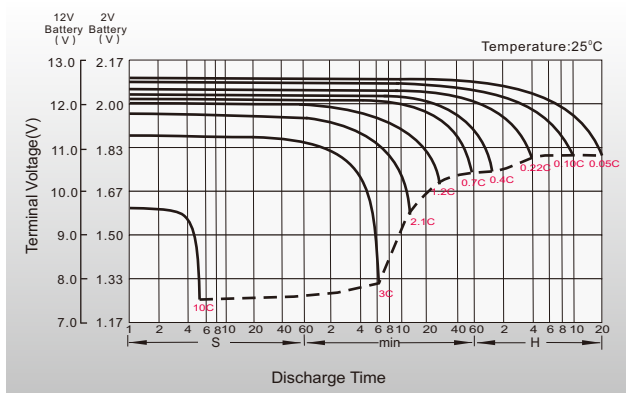


Float Charging Characteristics

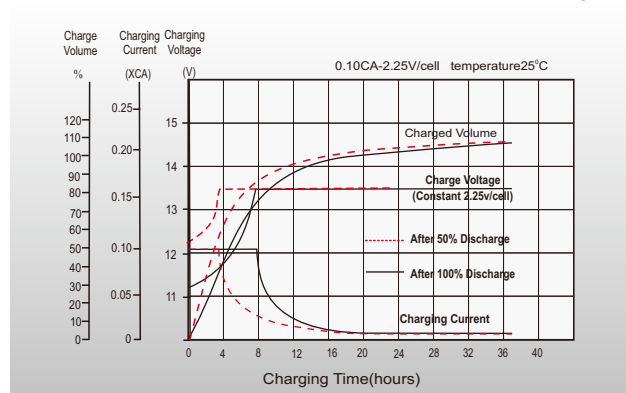

Temperature Effects in Relation to Battery Capacity

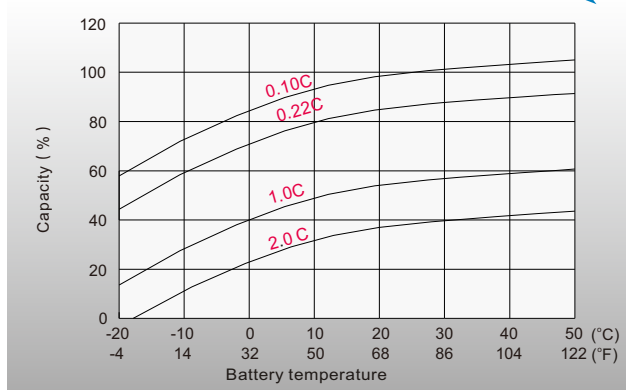

Effect of Temperature on Long Term Float Life

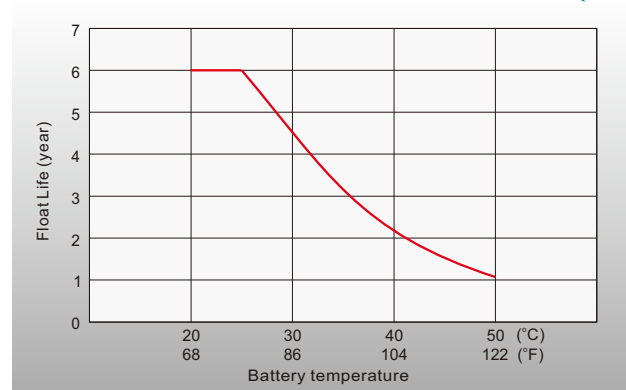

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (65 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

Middle East and Turkey

Oruç Reis Mahallesi Giyim Kent 7. Sokak B 80 Blok No:60
A, 34235 Esenler/Istanbul, Turkey
+90 212 438 31 77
sales@voltinger.com

Singapore Sales Office

No. 1 Tech Park Crescent, Singa-
pore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Malaysia Factory

Lot 13338 & 2493, Jalan
Sukepi, Kawasan Perindustrian
Jenjarom, 42600 Jenjarom,
Kuala Langat, Selangor,
Malaysia +60 3-3191
6133